


Bolta-Flite Bolta-Scoop



Belt Attachments


Holz Rubber carries two styles of bolt-on conveyor belt cleats to meet every requirement.

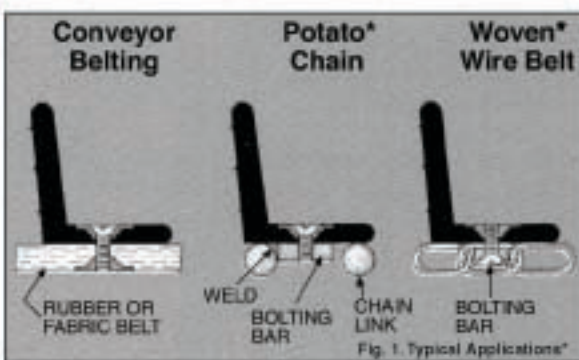

HOLZ BOLT-ON CLEATS find widespread use on agricultural equipment, trenching and ditching machinery, portable conveyors and in industries such as food processing, stamping plants, postal service, etc., wherever materials must be moved on steep inclines.

Cleats can be easily installed using only a belt punch and screwdriver and the bolt-on design means that the cleats can be re-used when the belt wears out.


Each cleat style may be ordered in approximate lengths for maximum economy or cut-to-length, ready to install.

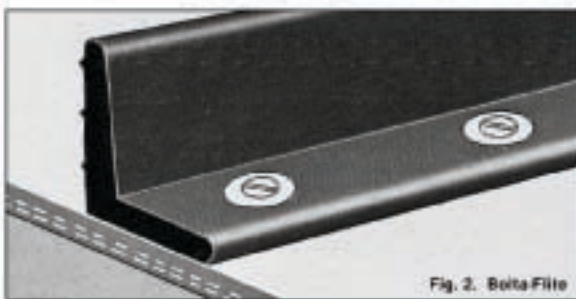

Bolta-Flite

An economical and simple to use cleat for general incline service on conveyor belting, potato chain and woven wire belt. (Figures 1 and 2)

Exclusive Holz Compounding ensures long cleat life even under severe operating conditions, including the effects of sun and weather. Special Compounds are available for unusual conveying applications. Cleat sections may be butted end-to-end to eliminate remnants and keep costs down.

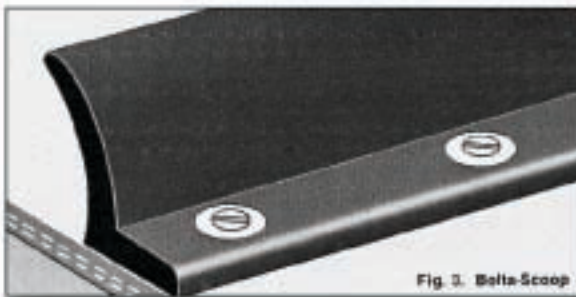

Bolta-Scoop

Bolta-Scoop cleats are basically the same as Bolta-Flite except that the vertical leg is slightly curved for additional carrying capacity. (Figure 3) The concave cleat bottom seals tightly when the bolts are tightened.

HOLZ HOT LINE "TOLL FREE" 800-285-1600

PRODUCT INFORMATION FOR HOLZ BOLT-ON CONVEYOR BELT CLEATS


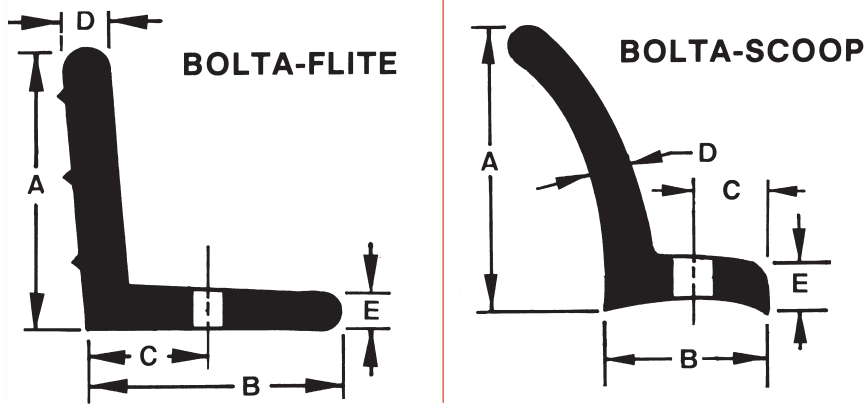


FIGURE 4: CLEAT CROSS-SECTIONS

Fig. 5. Bolta-Flite and ① ③ Bolta-Scoop Hardware

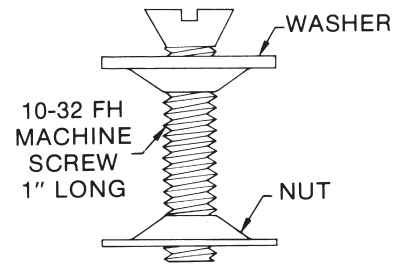

	CLEAT HEIGHT	APPROX. WEIGHT/FT. ②	DIMENSIONS					LENGTHS	MINIMUM PULLEY DIAMETER	FASTENER
BOLTA-FLITE	1"	0.35 lb.	1"	1"	1/2"	3/16"	3/16"	to 48"	3"	Fig. 5
	1 1/2"	0.50 lb.	1 1/2"	1 7/16"	5/8"	1/4"	1/4"	to 48"	3"	Fig. 5
	2"	0.65 lb.	2"	1 7/16"	3/4"	1/4"	1/4"	to 48"	3"	Fig. 5
	2 1/2"	0.75 lb.	2 1/2"	1 9/16"	3/4"	5/16"	1/4"	to 48"	3"	Fig. 5
	3"	0.85 lb.	3"	1 9/16"	13/16"	5/16"	1/4"	to 48"	3"	Fig. 5
	4"	0.90 lb.	4"	1 9/16"	7/8"	5/16"	1/4"	to 48"	4"	Fig. 5
BOLTA-SCOOP	1"	0.40 lb.	1"	1 1/8"	7/16"	1/4"	1/4"	to 48"	3"	Fig. 5
	1 1/2"	0.45 lb.	1 1/2"	1 1/4"	7/16"	1/4"	9/32"	to 48"	3"	Fig. 5
	2"	0.50 lb.	2"	1 3/8"	1/2"	5/16"	5/16"	to 48"	3"	Fig. 5
	2 1/2"	0.65 lb.	2 1/2"	1 3/8"	1/2"	5/16"	11/32"	to 48"	3"	Fig. 5
	3"	0.85 lb.	3"	1 1/2"	1/2"	5/16"	3/8"	to 48"	3"	Fig. 5
	4"	0.90 lb.	4"	1 1/2"	9/16"	5/16"	3/8"	to 48"	4"	Fig. 5

ADDITIONAL INFORMATION	COMPOUNDS, SPECIAL CONSTRUCTIONS
Standard Constructions Bolta-Flite & Bolta-Scoop	Black SBR, 85 durometer ±5
Special Constructions	All cleat styles are available in several other compounds and colors on request.

NOTES:

① Approximate hardware weight 0.0216 lb. each. ② Weights include hardware. ③ Bolts may be trimmed to length after installation.

1129 South Sacramento Street · Call Box 241002
 Lodi, CA 95241 USA
 Phone: 209-368-7171 · Fax 209-368-3246
 Phone: (U.S. & Canada) 1-800-285-1600
 Fax: (U.S. & Canada) 1-800-756-9998
<http://www.holzrubber.com>
 E-mail: sales@holzrubber.com

Distributed by: