




HOLZ
RUBBER COMPANY, INC.

Application Data Sheet

High Temperature Ducting Joint Provides A Solution For A Gas Turbine

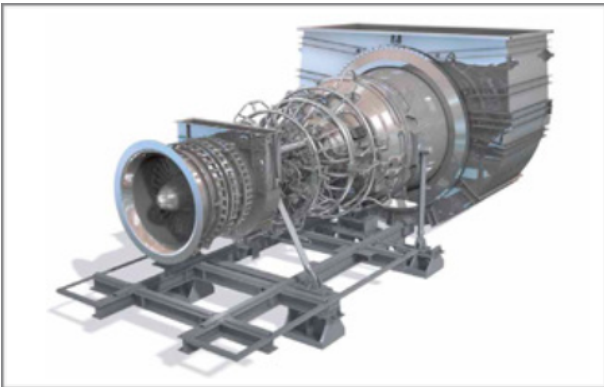

Application: Discharge of gas turbine engine bleed air to overboard ducting.

Problem: Gas turbines require testing for performance, emissions, and structural design integrity before being available on the market.



Solution: The Holz Team provided fully assembled expansion joint units for the testing of a new gas turbine. The gas turbine was tested successfully for use in simple cycle, combined cycle, and cogeneration applications.

The turbine tested provides the highest power output of any aero derivative gas turbine generator package available on the market.



“Experience the Difference”

ejsales@holzrubber.com

Toll-Free: (800) 285-1600

Fax: (209)368-3246