


TEFLON* LINED Expansion Joints




HOLZ
RUBBER COMPANY, INC.
1-800-285-1600 • Quality Since 1935

QUALITY • VALUE • PRICING

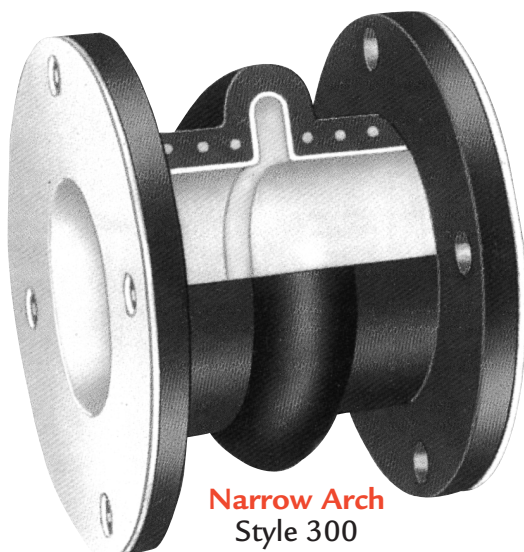

Narrow Arch
Style 300

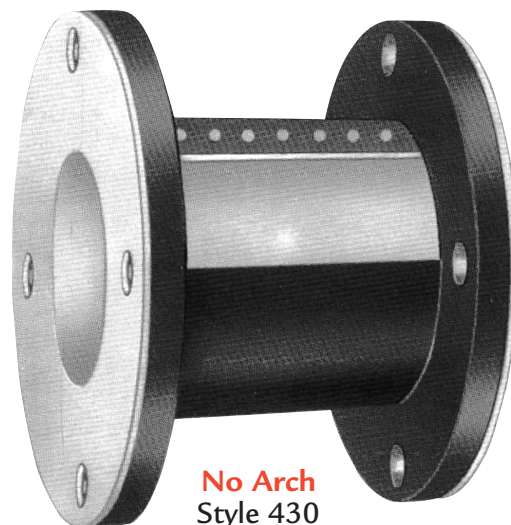


No Arch
Style 430

SPECIAL

LINER FEATURES:

- Corrosion Protection
- High Temperature Applications
- Non-Stick Surface
- Permeation Resistant
- Light Weight Material

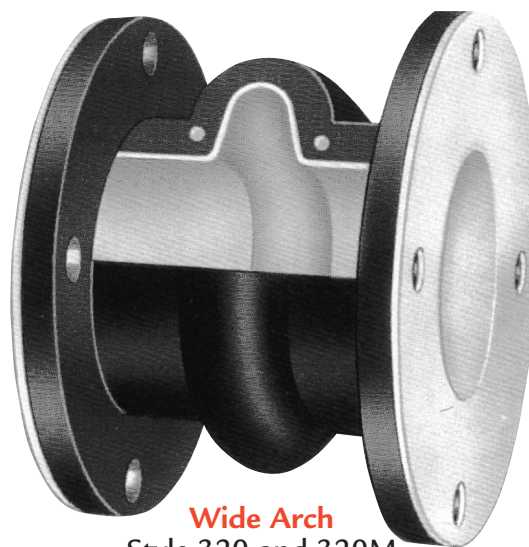


Wide Arch
Style 320 and 320M

*Registered trademark of E.I. DuPont de Nemours & Co., Inc.


1129 South Sacramento Street • Call Box 241002
Lodi, CA 95241 USA
Phone: 209-368-7171 • Fax 209-368-3246
Phone: (U.S. & Canada) 1-800-285-1600
Fax: (U.S. & Canada) 1-800-756-9998
<http://www.holzrubber.com>
E-mail: sales@holzrubber.com

Distributed by:


STYLE 300

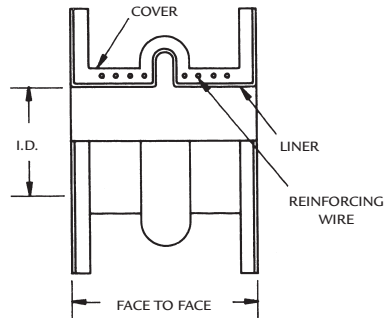


STYLE 320

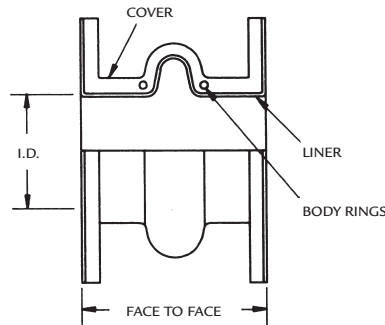

STYLE 320M

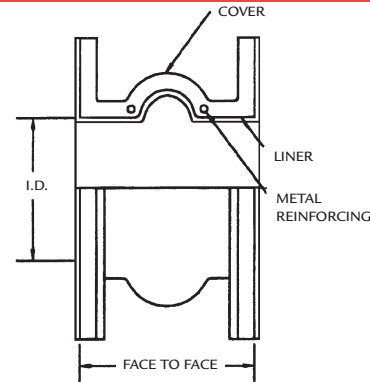

STYLE 430

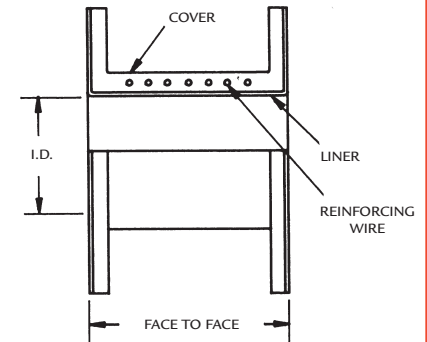

Maximum Movements (Inches)

Nom. I.D.	Face/Face	Compression	Extension	Lateral	Angular
1	6	1/2	1/4	1/2	27.5°
1 1/2	6	1/2	1/4	1/2	18.5°
2	6	1/2	1/4	1/2	14.5°
2 1/2	6	1/2	1/4	1/2	11.5°
3	6	1/2	1/4	1/2	10°
4	6	1/2	1/4	1/2	7.5°
5	6	1/2	1/4	1/2	6.0°
6	6	1/2	1/4	1/2	5.0°
8	8	3/4	3/8	1/2	5.5°
10	8	3/4	3/8	1/2	4.5°
12	8	3/4	3/8	1/2	3.8°
14	8	3/4	3/8	1/2	3.3°
16	8	3/4	3/8	1/2	2.8°
18	8	3/4	3/8	1/2	2.5°
20	8	7/8	7/16	1/2	2.5°
22	10	7/8	7/16	1/2	2.3°
24	10	7/8	7/16	1/2	2.0°
30	10	1	1/2	1/2	2.0°
36	10	1	1/2	1/2	1.5°
42	12	1 1/8	9/16	1/2	1.5°
48	12	1 1/8	9/16	1/2	1.3°

1. Custom linings also available in other sizes and multiple arches.
2. Temperature up to 300° F and pressure up to 180 PSIG.

Maximum Movements (Inches)

Nom. I.D.	Face/Face	Compression	Extension	Lateral	Angular
10	8	1 3/4	1	1	15.3°
12	8	1 3/4	1	1	12.9°
14	8	1 3/4	1	1	11.1°
16	8	1 3/4	1	1	9.8°
18	8	1 3/4	1	1	8.7°
20	8	1 3/4	1	1	7.8°
22	8	1 3/4	1	1	7.1°
24	10	1 3/4	1	1	6.6°
30	10	1 3/4	1	1	5.2°
36	10	1 3/4	1	1	5.7°
42	12	2 1/4	1 1/4	1	4.9°
48	12	2 1/4	1 1/4	1	4.3°

1. Custom linings also available in other sizes and multiple arches.
2. Temperature up to 300° F and pressure up to 225 PSIG.

* Registered trademark of E.I. DuPont de Nemours & Co., Inc.

Maximum Movements (Inches)

Nominal I.D.	Face to Face	Movements			
		Comp.	Ext.	Lat.	Ang.
1 1/2	6	1.25	0.625	0.625	28.00
2	6	1.25	0.625	0.625	25.00
2 1/2	6	1.25	0.625	0.625	20.25
3	6	1.25	0.625	0.625	18.00
4	6	1.25	0.625	0.625	14.25
5	6	1.25	0.625	0.625	13.00
6	6	1.25	0.625	0.625	12.25
8	6	1.25	0.625	0.625	12.00
10	8	2.00	1.00	1.00	11.90
12	8	2.00	1.00	1.00	11.30
14	8	2.00	1.00	1.00	11.55
16	8	2.00	1.00	1.00	10.12
18	8	2.00	1.00	1.00	8.95
20	8	2.00	1.00	1.00	8.10
24	10	3.00	1.50	1.50	9.00
28	10	3.00	1.50	1.50	7.75
30	10	3.00	1.50	1.50	7.50
36	10	3.00	1.50	1.50	6.75
40	10	3.00	1.50	1.50	6.50
42	12	3.00	1.50	1.50	6.25
48	12	3.00	1.50	1.50	6.00

1. Temperature up to 300° F and pressure up to 225 PSIG.
2. Sizes thru 72" ID.

Maximum Movements (Inches)

VIBRATION ONLY

1. Temperature up to 300° F and pressure up to 180 PSIG.

Teflon* Liner Features:

Nominal liner thickness is .090, other thicknesses available depending upon the application.

Corrosion resistant to most chemicals. See HOLZ.

Resistant to mechanical damage, permeation and the non-stick, smooth surface finish provides excellent release properties.

Material is fluorinated ethylene propylene (FEP) or Polytetrafluoro-ethylene (PTFE).

Additional styles are available with pressures to 325 PSIG.

